

# Product Flash



## Static Cling


### NON-Top Coated

Hi-Tack ♦ Hi-Clarity ♦ Pliable

**Superior Clarity** due to our unique formulation and calendar configuration.

**Optimal performance** with quality maintained through conditioning, storage and suspended packaging.

**Stocked for no more than 30 days Max on floor**

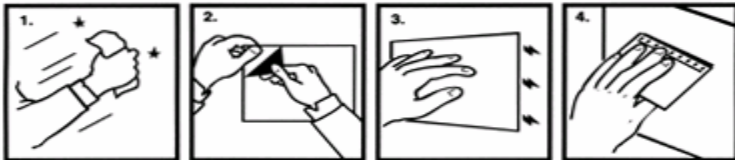

### Conditioning and Storage – Why it counts:

Temperature and humidity have great impact on PVC film. Improper storage can result in a loss of flexibility and poor material performance.

To ensure ideal results when material is used, **CONDITIONING is critical.**

The applicable ASTM method (ASTM D 1593) prescribes the following ideal conditions for material storage and conditioning:

- Relatively **low humidity.**
- Storage temperature range **between 70<sup>o</sup> and 86<sup>o</sup>F.**
- Letting the material rest for a **minimum of 40 hours** on a **clean and smooth surface PRIOR to PRINTING.**

### **SHELF LIFE:**

As mentioned above, Static Cling is sensitive to storage condition and laminating preemptively can shorten the shelf life of the material.

**Our product is stocked for a maximum of 30 days.**

**CLEAR** in .006 & .008 ga  
**COLORS** in .010 ga (20 colors)

**WIDTHS:** 36 3/4" / 40" / 51"  
54" / 60 1/2"

**Krome Kote:** 8 PT, 10 PT

**Phthalate Free Available!**

**Non-Top Coated suitable for:**  
**Digital, Silkscreen**  
**UV Offset Printing**



### Going Green with Suspended Packaging

Our static cling rolls are placed in suspended packaging to prevent marks and material depressions. **Even better, we recycle all end caps!**



**We offer good lead times and quick turn around for sheet stock.**

## Call us today!

**Special pricing programs available for continuous Static Cling users!**

**1-888-782-8323**